

COVERLIGHT, FILTER 0206

PRODUKTINFORMATION


Produkt Typ: **LASERSCHUTZBRILLEN**

Artikel Nr.: **000-G0206-COVE-01**

Geeignet für folgende Laser: Diode-Nd:YAG (800 - 1400 nm)
Yb:YAG/Scheibe (1030 nm)
Faser (976 - 1080 nm)
Telecom (1320 nm)

Zertifiziert nach: **DIN EN 207**



Filter Material: Polymer
Rahmenfarbe: Schwarz
Rahmenmaterial: Aluminium

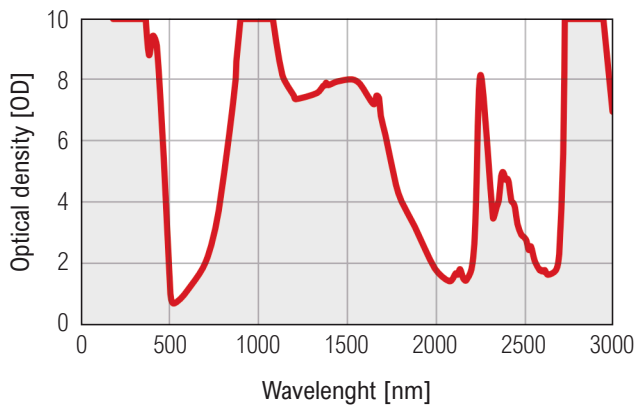

Dicke: **3,5 mm** Filterfarbe: **Grün** VLT~ **20%**

Wellenlänge [nm]	Schutzstufe [EN207]	OD
315-450	D LB5 + IR LB6	OD6+
> 450-465	DIR LB5	OD5+
> 465-475	DIR LB4	OD4+
> 475-480	DIR LB3	OD3+
> 480-490	DIR LB2	OD2+
> 490-500	DIR LB1	OD1+
620-720	DIR LB1	OD1+
> 720-760	DIR LB2	OD2+
> 760-795	DIR LB3	OD3+
> 795-820	DIR LB4	OD4+
> 820-840	DIR LB5	OD5+
> 840-860	DIR LB6	OD6+
> 860-900	D LB6 + IR LB7	OD7+
> 900-1100	D LB6 + IR LB8	OD8+
> 1100-1125	D LB6 + IR LB7	OD7+
> 1125-1165	DIR LB6	OD6+
> 1165-1400	DIR LB5	OD5+
> 1400-1800	DI LB3 + M LB1	OD3+
2250-2450	DI LB3 + M LB1	OD3+
2750-3000	DI LB3 + M LB1	OD3+

PF S CE

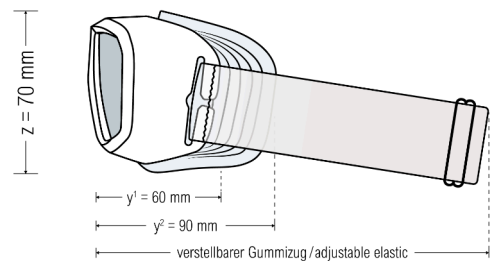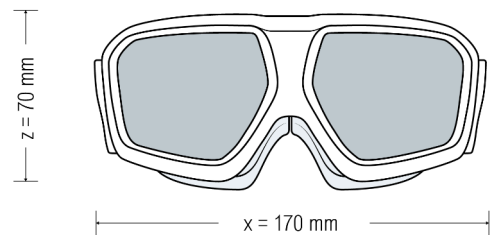

Alle Angaben ohne Gewähr.
All information is provided without guarantee.

COVERLIGHT, FILTER 0206

PRODUCT INFO


Product type: **LASER SAFETY GOGGLES**

Item No.: **000-G0206-COVE-01**

Can be used with Diode-Nd:YAG (800 - 1400 nm)
following laser types: Yb:YAG/Disk (1030 nm)
Fiber (976 - 1080 nm)
Telecom (1320 nm)

Certified acc. to: **DIN EN 207**



Filter material: Polymer
Frame color: Black
Frame material: Aluminium

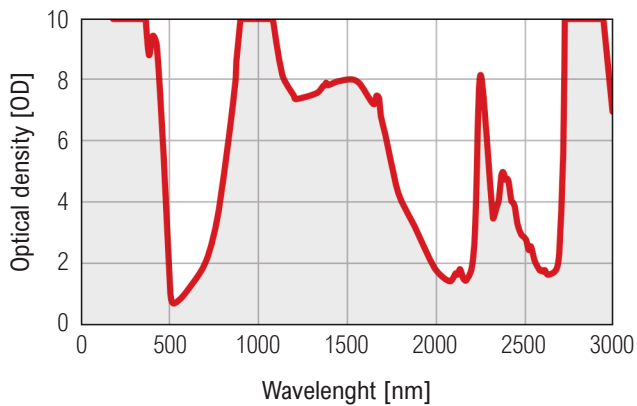

Thickness: **3,5 mm** Filter color: **Green** VLT~ **20%**

Wavelength [nm]	Protection level [EN207]	OD
315-450	D LB5 + IR LB6	OD6+
> 450-465	DIR LB5	OD5+
> 465-475	DIR LB4	OD4+
> 475-480	DIR LB3	OD3+
> 480-490	DIR LB2	OD2+
> 490-500	DIR LB1	OD1+
620-720	DIR LB1	OD1+
> 720-760	DIR LB2	OD2+
> 760-795	DIR LB3	OD3+
> 795-820	DIR LB4	OD4+
> 820-840	DIR LB5	OD5+
> 840-860	DIR LB6	OD6+
> 860-900	D LB6 + IR LB7	OD7+
> 900-1100	D LB6 + IR LB8	OD8+
> 1100-1125	D LB6 + IR LB7	OD7+
> 1125-1165	DIR LB6	OD6+
> 1165-1400	DIR LB5	OD5+
> 1400-1800	DI LB3 + M LB1	OD3+
2250-2450	DI LB3 + M LB1	OD3+
2750-3000	DI LB3 + M LB1	OD3+

PF S CE

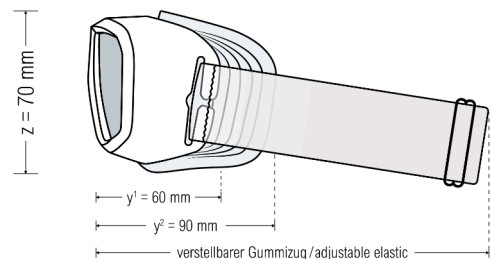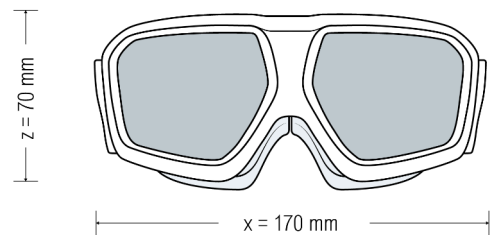

Alle Angaben ohne Gewähr.
All information is provided without guarantee.